

# Miniaturised pressure sensor

## Model M-10, standard version

## Model M-11, version with flush diaphragm

WIKA data sheet PE 81.25



for further approvals  
see page 5

**MicroTronic®**

### Applications

- Machine building
- Hydraulics and pneumatics
- General industrial applications

### Special features

- Measuring ranges from 0 ... 6 to 0 ... 1,000 bar
- Current and voltage outputs
- Ingress protection IP65 or IP67
- Wetted parts and case from stainless steel
- Vacuum-tight



Configurator



Fig. left: Model M-10 with angular connector  
Fig. centre: Model M-11 with circular connector M12 x 1  
Fig. right: Model M-10 with cable outlet

## Description

### Slimline

The model M-10 or M-11 pressure sensor is one of the thinnest and smallest industrial pressure sensors on the market. It therefore offers the ideal solution for applications where mounting space is limited.

### Robust

Despite their slimline and compact design, the models M-10 and M-11 are designed for high pressure ranges up to 1,000 bar.

The thin-film measuring cell, through the optimised design of its process connection, guarantees a high measurement performance, even with dynamic loads and extreme pressure spikes.

### Precise

The models M-10 and M-11 offer an accuracy of 0.5 %. In combination with an exceptional long-term stability, reliable acquisition of the measured values is ensured.

### Flush

The model M-11 pressure sensor features a flush process connection, which sets it apart from other miniaturised pressure sensors.

This process connection is especially suited to measurement in highly viscous, contaminated or crystallising media.

## Measuring ranges

Gauge pressure						
bar	Measuring range	0 ... 6 <sup>1)</sup>	0 ... 10 <sup>1)</sup>	0 ... 16 <sup>1)</sup>	0 ... 25	0 ... 40
	Overpressure safety	20	20	32	50	80
	Measuring range	0 ... 60	0 ... 100			
	Overpressure safety	120	200			
psi	Measuring range	0 ... 160	0 ... 250	0 ... 400	0 ... 600	0 ... 1,000 <sup>1)</sup>
	Overpressure safety	320	500	800	1,200	1,500
	Measuring range	0 ... 500	0 ... 1,000	0 ... 3,000	0 ... 5,000	0 ... 10,000 <sup>1)</sup>
	Overpressure safety	1,000	2,000	6,000	10,000	20,000
	Measuring range	0 ... 15,000 <sup>1)</sup>				
	Overpressure safety	20,000				

1) Only for model M-10

Other measuring ranges on request

### Vacuum tightness

Yes

## Output signal

Signal type	Signal
Current (2-wire)	4 ... 20 mA
Voltage (3-wire)	DC 1 ... 5 V
	DC 0.1 ... 10 V

Other output signals on request

### Load in $\Omega$

4 ... 20 mA:  $\leq (\text{power supply} - 10 \text{ V}) / 0.02 \text{ A}$

DC 1 ... 5 V:  $> 10\text{k}$

DC 0.1 ... 10 V:  $> 20\text{k}$

## Voltage supply

### Power supply

The power supply depends on the selected output signal

4 ... 20 mA: DC 10 ... 35 V

DC 1 ... 5 V: DC 8 ... 35 V

DC 0.1 ... 10 V: DC 14 ... 35 V

Models M-10 and M-11 can be used with up to DC 36 V. The CSA approval is valid up to a maximum of DC 35 V.

### Total current consumption

Current output (2-wire): Signal current, max. 25 mA

Voltage output (3-wire): 8 mA

## Reference conditions (per IEC 61298-1)

### Temperature

15 ... 25 °C (59 ... 77 °F)

### Atmospheric pressure

860 ... 1,060 mbar (12.5 ... 15.4 psi)

### Humidity

45 ... 75 % r. h.

### Power supply

DC 24 V

### Nominal position

Calibrated in vertical mounting position with process connection facing downwards.

## Accuracy specifications

### Accuracy at room temperature

≤ ±0.5 % of span

Including non-linearity, hysteresis, zero offset and end value deviation (corresponds to measured error per IEC 61298-2).

### Non-linearity (per IEC 61298-2)

≤ ±0.2 % of span BFSL

### Non-repeatability

≤ 0.1 % of span

### Temperature error at -20 ... +80 °C (-4 ... +176 °F)

- Mean temperature coefficient of zero point  
≤ ±0.2 % of span/10 K

The following applies for model M-11 with measuring range 0 ... 25 bar:  
≤ ±0.3 % of span/10 K

- Mean temperature coefficient of span  
≤ ±0.2 % of span/10 K

### Long-term stability

≤ ±0.2 % of span/year

## Time response

### Settling time

≤ 4 ms

### Switch-on time

≤ 15 ms

## Operating conditions

### Ingress protection (per IEC 60529)

For ingress protection see "Electrical connections"  
The ingress protection stated therein only applies when plugged in using mating connectors that have the appropriate ingress protection.

### Vibration resistance (per IEC 60068-2-6)

20 g (under resonance)

### Shock resistance (per IEC 60068-2-27)

800 g (mechanical shock)

### Service life

10 million load cycles

### Permissible temperatures

Medium: -40 ... +100 °C (-40 ... +212 °F)  
Ambient: -40 ... +100 °C (-40 ... +212 °F) <sup>1)</sup>  
Storage: -40 ... +100 °C (-40 ... +212 °F) <sup>1)</sup>

<sup>1)</sup> Instruments with cable outlet are only suitable for an ambient and storage temperature of -40 ... +80 °C (-40 ... +176 °F).

## Process connections

### ■ Model M-10

Standard	Thread size
EN 837	G ¼ B
DIN EN ISO 1179-2 (formerly DIN 3852-E)	G ¼ A <sup>1)</sup>
ANSI/ASME B1.20.1	¼ NPT

<sup>1)</sup> Maximum overpressure safety 600 bar (8,000 psi)

### ■ Model M-11

Standard	Thread size
-	G ¼ B flush <sup>1)</sup>

<sup>1)</sup> Flush process connections only possible for measuring ranges from 0 ... 25 to 0 ... 600 bar (0 ... 500 to 0 ... 5,000 psi).

### Sealings

G ¼ A: FPM/FKM  
G ¼ B: without sealing  
¼ NPT: without sealing  
G ¼ B flush: NBR <sup>1)</sup>

<sup>1)</sup> Minimum permissible medium and ambient temperature -30 °C (-22 °F)

## Electrical connections

Designation	Ingress protection	Wire cross-section	Cable diameter	Cable material
Circular connector M12 x 1 (4-pin)	Measuring range < 100 bar (3,000 psi): IP65 <sup>1)</sup> Measuring range ≥ 100 bar (3,000 psi): IP67	-	-	-
Angular connector DIN EN 175301-803 C	IP65 <sup>2)</sup>	-	1.5 ... 6.0 mm	-
Cable outlet, 1.5 m (4.92 ft) <sup>3)</sup> <sup>4)</sup>	Measuring range < 100 bar (3,000 psi): IP65 <sup>1)</sup> Measuring range ≥ 100 bar (3,000 psi): IP67	3 x 0.14 mm <sup>2</sup> <sup>5)</sup>	4.5 ... 5.0 mm	PUR

1) IP67 on request

2) For conductor cross-section to max. 0.75 mm<sup>2</sup>

3) Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F)

4) Other cable lengths on request

5) For wire cross-section to max. 0.3 mm<sup>2</sup>, approx. AWG 22 with end splices

The stated ingress protection only applies when plugged in using mating connectors that have the appropriate ingress protection.

### Short-circuit resistance

S+ vs. 0V

### Reverse polarity protection

U<sub>B</sub> vs. 0V


### Insulation voltage

DC 500 V

### Connection diagrams

Circular connector M12 x 1 (4-pin)			
		2-wire	3-wire
	U <sub>B</sub>	1	1
	0V	3	3
	S+	-	4

Angular connector DIN 175301-803 C			
		2-wire	3-wire
	U <sub>B</sub>	1	1
	0V	2	2
	S+	-	3

Cable outlet, 2 m			
		2-wire	3-wire
	U <sub>B</sub>	brown	brown
	0V	green	green
	S+	-	white

## Materials

### Wetted parts

316Ti, PH grade steel

For sealing materials see "Process connections"

### Non-wetted parts

Case: 316Ti

Electrical connections:

- Circular connector M12 x 1: Nickel-plated brass
- Angular connector DIN EN 175301-803 C: 303, PA, PBT
- Cable outlet: PA

### Internal system fill fluid (model M-11 only)

Synthetic oil

## Approvals

Logo	Description	Country
	<b>EU declaration of conformity</b> <ul style="list-style-type: none"> <li>■ EMC directive EN 61326 emission (group 1, class B) and interference immunity (industrial application)</li> <li>■ Pressure equipment directive</li> <li>■ RoHS directive</li> </ul>	European Union
	<b>CSA</b> Safety (e.g. electr. safety, overpressure, ...)	USA and Canada
	<b>EAC</b> EMC directive	Eurasian Economic Community
	<b>GOST</b> Metrology, measurement technology	Russia
	<b>KazInMetr</b> Metrology, measurement technology	Kazakhstan
	<b>BelGIM</b> Metrology, measurement technology	Belarus
	<b>Uzstandard</b> Metrology, measurement technology	Uzbekistan
-	<b>CRN</b> Safety (e.g. electr. safety, overpressure, ...)	Canada




## Manufacturer's information and certifications

Logo	Description
-	<b>MTTF: &gt; 100 years</b>
-	<b>China RoHS directive</b>


Approvals, certificates and manufacturer's information, see website

# Dimensions in mm [in]


## Pressure sensor

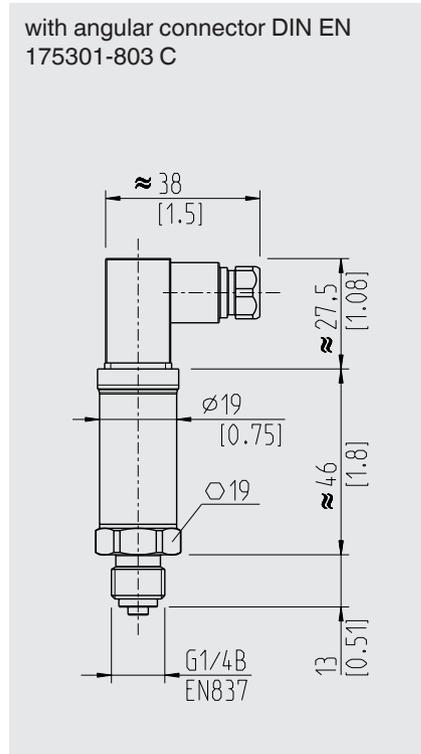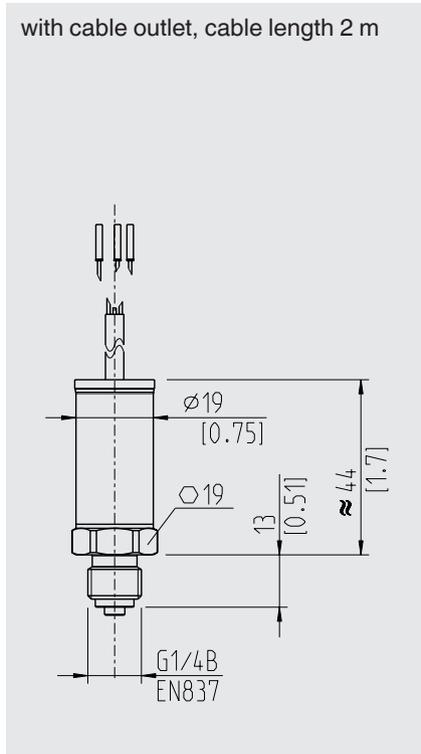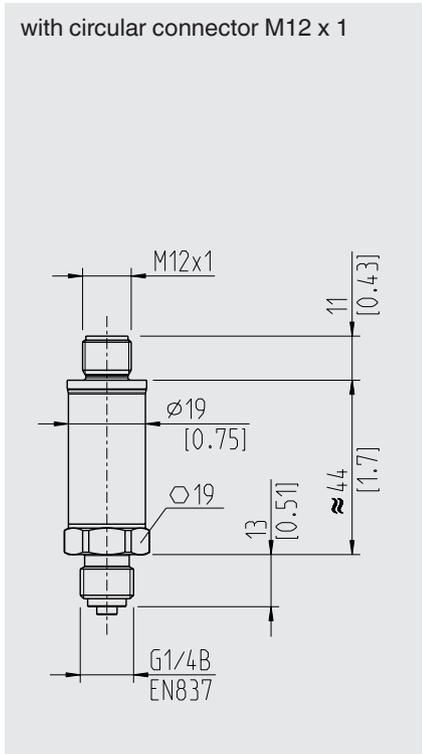


### Process connections for model M-10

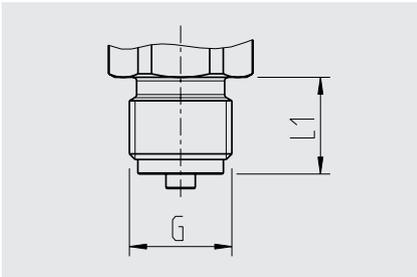

G	L1
G 1/4 B EN 837	13 [0.51]

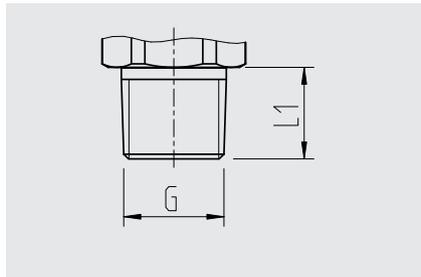


G	L1
1/4 NPT	13 [0.51]

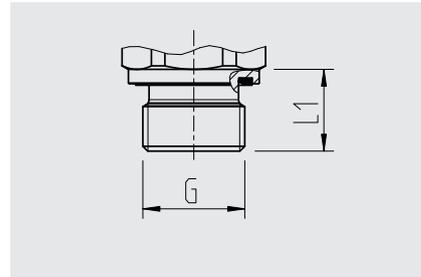

G	L1
G 1/4 A DIN EN ISO 1179-2 (formerly DIN 3852-E)	14 [0.55]


### Process connection for model M-11

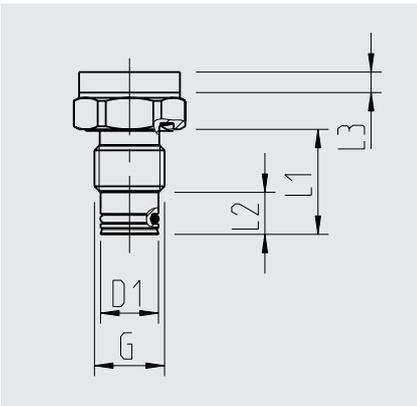

G	L1	L2	L3	D1
G 1/4 B	20 [0.79]	8 [0.31]	3.9 [0.15]	10.9 [0.43]

For information on tapped holes and welding sockets, see Technical information IN 00.14 at [www.wika.com](http://www.wika.com).

## Accessories and spare parts

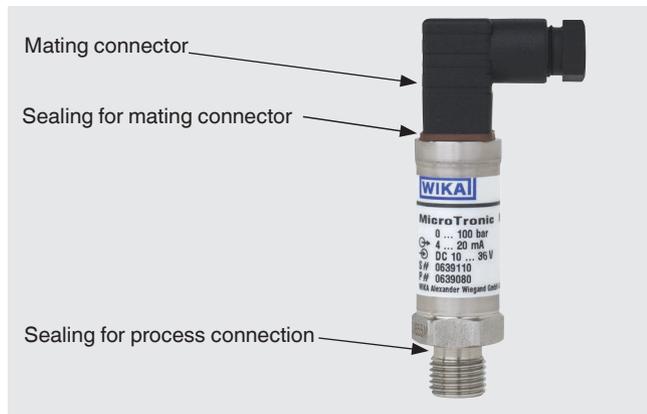

### Mating connector

Designation	Order number		
	without cable	with 2 m cable	with 5 m cable
Angular connector DIN 175301-803 C	1439081	11225823 <sup>2)</sup>	11250194 <sup>2)</sup>
Circular connector M12 x 1, 4-pin			
■ straight	2421262 <sup>1)</sup>	11250780 <sup>3)</sup>	11250259 <sup>3)</sup>
■ angled	2421270 <sup>1)</sup>	11250798 <sup>3)</sup>	11250232 <sup>3)</sup>

1) Max. medium temperature -40 ... +85 °C (-40 ... +185 °F)

2) Max. medium temperature -40 ... +90 °C (-40 ... +194 °F)

3) Max. medium temperature -25 ... +80 °C (-13 ... +176 °F)

### Sealings for mating connectors

Designation	Order number
Angular connector DIN 175301-803 C	11437881

### Sealings for process connection

Designation	Order number
G ¼ B flush, O-ring	0477940
G ¼ B flush, form seal	1537857 <sup>1)</sup>
G ¼ A DIN EN ISO 1179-2 (formerly DIN 3852-E)	14045531

1) -30 ... +100 °C (-22 ... +212 °F)

Accessories are not part of the approval.

### Ordering information

Measuring range / Output signal / Process connection / Electrical connection

© 04/2000 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.

The specifications given in this document represent the state of engineering at the time of publishing.

We reserve the right to make modifications to the specifications and materials.

Configurator

